


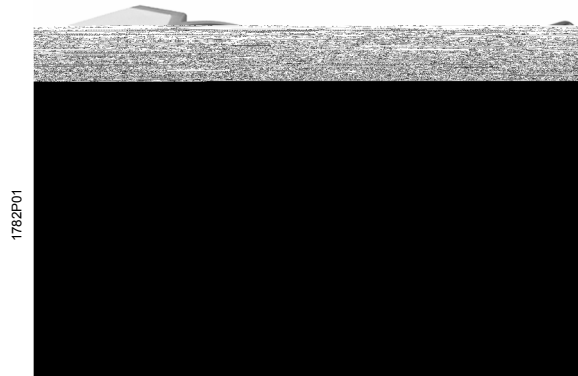

Symaro™

-
- - AC 24 V DC 13.5...35 V
 - DC 0...10 V 4...20 mA
-

-
-
-

	G ½ A 1)	100 mm	AC 24 V ±20 % / DC 13.5...35 V	DC 0...10 V
	G ½ A 1)	150 mm	AC 24 V ±20 % / DC 13.5...35 V	DC 0...10 V
	G ½ A 1)	100 mm	DC 13.5...35 V	4...20 mA
	G ½ A 1)	150 mm	DC 13.5...35 V	4...20 mA

1) 2008.4.1


DC 0...10 V 4...20 mA

山

山

DC 0...10 V 4...20 mA

山

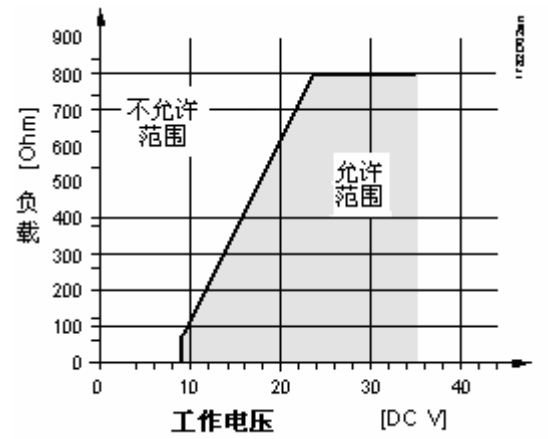

山



山

山

()

	V4A (1.4571)	PN16			---	
	(CuZn37)	PN10			100 mm	
	Brass (CuZn37)	PN10			150 mm	
	V4A (1.4571)	PN16			100 mm	
	V4A (1.4571)	PN16			150 mm	
	V4A (1.4571)	PN40			100 mm	
	V4A (1.4571)	PN40			150 mm	

N1194

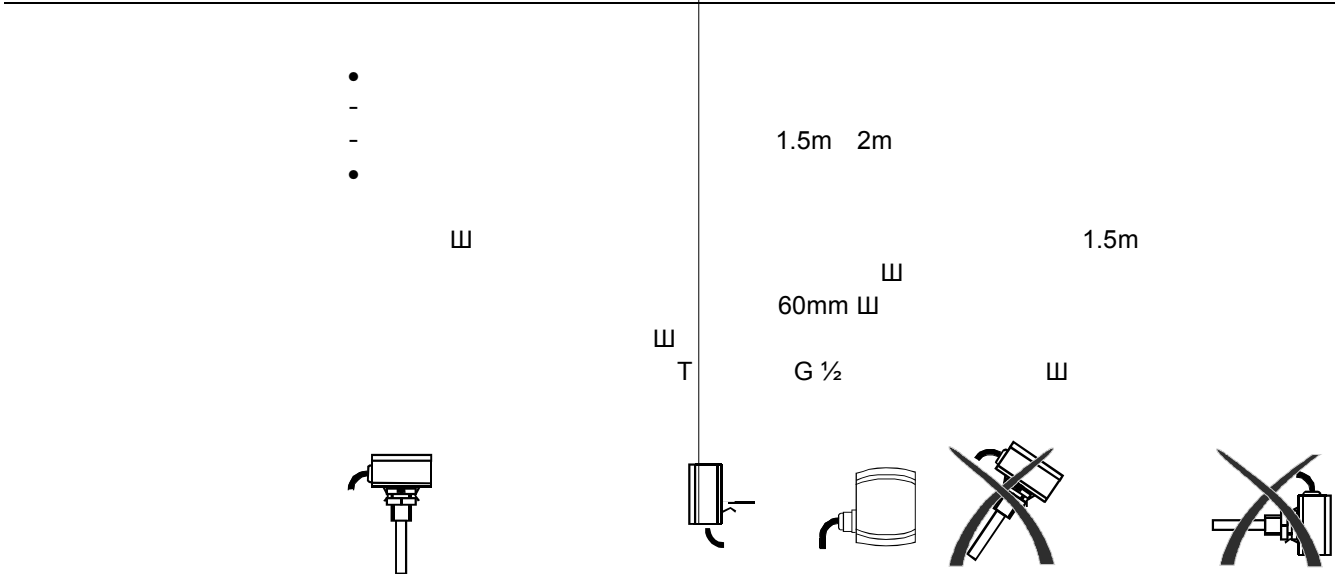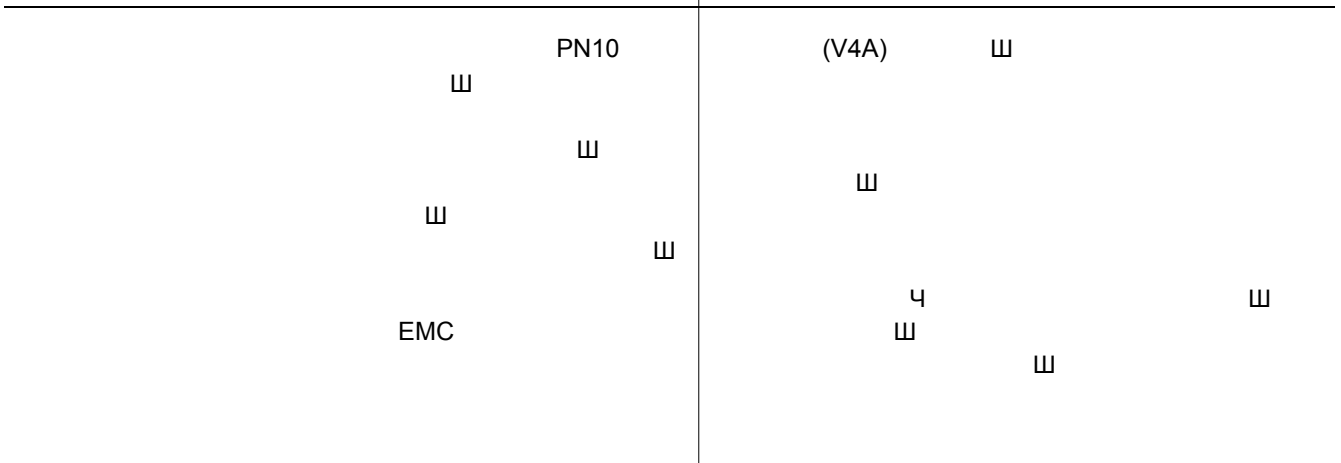

		“ ”
		50/60 Hz AC 24 V
		≤1 VA
		10...+120 °C (R2 =), 0...100 °C (R1), 0...70 °C (R3)
		“ ”
		Pt 1000 class B DIN EN 60 751
		30 s 2 m / s 8 s 2 m / s
		0...70 °C ±1 K -40...+120 °C ±1.4 K
	U1	DC 0...10 V $\hat{=}$ -10...+120 °C () 0...100 °C 0...70 °C, ±1 mA
	I1	4...20 mA $\hat{=}$ -10...+120 °C () 0...100 °C or 0...70 °C
		PN 16
		IP 54 IEC 529
		III EN 60 730
		1 x 2.5 mm ² 2 x 1.5 mm ²
	()	M 16 x 1.5
		IEC 721-3-3 class 3K5 -40...+70 °C 5...95 % r.h.
		IEC 721-3-2 class 2K3 -25...+70 °C <95 % r.h. class 2M2
		, RAL 7001 ()
		, RAL 7035 ()
		DIN 17 440 1.4571
		PA, RAL 7035 ()

	EN 60 730-1
	EN 61 000-6-2 EN 61 000-6-3
CE- CE	EMC Directive 2004/108/EC
 EMC	1992 AS/NZS 3548
UL UL	UL 873
QAE2164.010	0.14 kg
QAE2164.015	0.16 kg
QAE2174.010	0.14 kg
QAE2174.015	0.16 kg

for DC 13.5...35 V

0...120 °C () 0...100 °C 0...70 °C
 10...120 °C (), 0...100 °C 0...70 °C

